

XRS-MD Multi-Directional Series

Front and Rotational Side beam in one unit



Making the unseen seen


Versatile and Adaptable

Blue Front beam cap

Compatible with existing accessories
Minimized image edge fade

Gold Side beam cap

Rotates 360°
Operate in tight space

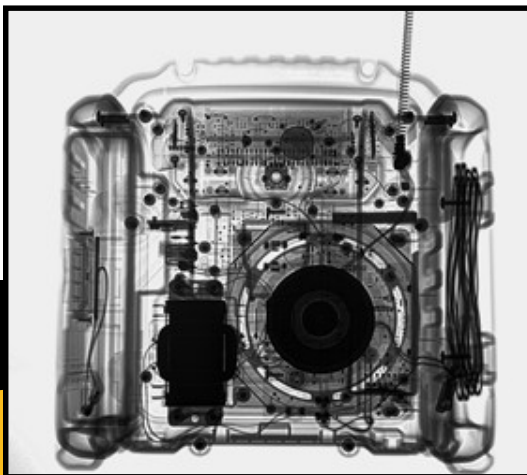

All-New Graphic Display



- Larger text and graphics
- Viewable in direct sunlight
- Colored text and backlight
- Extended temperature range
- Help button – access on-board context-sensitive help
- QR Code - access additional information online

Integrated Arca Swiss tripod mount



Field-Interchangeable Caps



- Adapt to the situation
- Direct X-ray beam **forward** or any angle out the **side**

Lemo connector above battery for easier access

		XRS3MD	XRS4MD
Dimensions	(with battery)	L: 15.42" (39.17 cm)	L: 19.26" (48.92 cm)
	(with Picatinny Rails)	W: 4.26" (10.82 cm)	W: 4.80" (12.19 cm)
	(without key)	H: 5.83" (14.81 cm)	H: 7.05" (17.91 cm)
Weight	(with battery)	11.80 lbs. (5.40 kg)	18.30 lbs (8.30 kg)
Average Output Dose*	Forward	3 mR per pulse	5 mR per pulse
	Side	0.6 mR per pulse	2 mR per pulse
Pulse Rate		15 pulses per second	9 pulses per second
Pulses per Battery charge		5500	3000
Operating Temperature		-4 to 158 °F (-20 to 70 °C)	-4 to 158 °F (-20 to 70 °C)
IP Rating		IP 54	IP 54

* Dose measured at 12" (30 cm) from source

* screen images simulated

Contact sales@goldenengineering.com for more information or to get a quote

Golden Engineering
Portable X-ray Technology

Celebrating 50 Years
of supplying quality products,
providing extraordinary service,
improving portable X-ray technology,
and being family-owned and operated.